

BORN FOR SAFETY

Intrinsically Safe DMR Portable Two-way Radio
HP715Ex IIA




Workers in the oil and gas industry or firefighters in the fire and rescue services work in extreme conditions and are exposed to risks from explosive gases, flammable dusts or chemical vapors. In these dangerous environments, safe, reliable and highly efficient communications are of utmost importance.

The new intrinsically safe portable DMR radio HP715Ex IIA leverages Hytera's 20 years of experience and expertise in explosion protection to take personal safety and mission-critical communications to a new level for workers in the oil and gas, mining, chemical and pharmaceutical industries, as well as other industries with potentially explosive atmospheres.

Certified with IECEx/ATEX, the HP715Ex IIA is the safest radio to keep the workers connected in hazardous environments without causing a fire or explosion. The HP715Ex IIA features an IS circuit, long-lasting explosion-proof battery, superior audio quality, extended radio coverage and advanced ergonomics for easy operation.



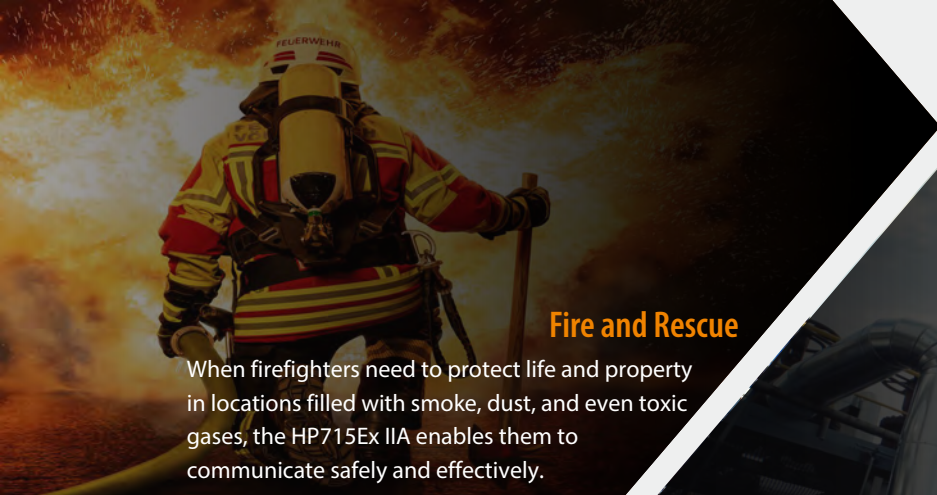

Fire and Rescue

When firefighters need to protect life and property in locations filled with smoke, dust, and even toxic gases, the HP715Ex IIA enables them to communicate safely and effectively.



Oil and Gas

In dangerous environments with flammable liquids and explosive gases, the HP715Ex IIA ensures stable communications for operators, enhancing their safety.



Mining

For miners working in complex coal mines with combustible dust and various explosive gases such as methane, the HP715Ex IIA ensures safety by keeping them connected to each other and to the control centre.



Manufacturing

In pharmaceutical processing, steel plant, food processing, and more industries where the chances of massive dust explosions are high, the HP715Ex IIA with a higher IS level can keep the workers safe by reliable communications.



Airport

In the airport with complex facilities that are exposed to fuels, the HP715Ex IIA offers the staff and on-site crew with instant and efficient communications.



Chemical Plant

In chemical plants, where the conversion and processing of flammable gases, liquids, and solids may lead to explosion, the HP715Ex IIA ensures stable communications for safe production.



ULTIMATE SAFETY

The HP715Ex IIA intrinsically safe radio is certified to standards listed by IECEx. It has been developed to provide safe and reliable communication in hazardous environments by adopting the new materials, brand-new structural design and innovative IS circuit. With optimized RF solution and pioneering audio solution, it extends communication range and provides better audio. Moreover, the HP715Ex IIA prepares for the unexpected with features like lone worker, man down, and precise positioning.

IECEx

Ex ib I Mb
Ex ib IIA T4 Gb
Ex ib IIIC T120°C Db
IP66/IP67/IP68, -25°C≤Ta≤+50°C

ATEX

I M2 Ex ib I Mb
II 2G Ex ib IIA T4 Gb
II 2D Ex ib IIIC T120°C Db
IP66/IP67/IP68, -25°C≤Ta≤+50°C

US

Class I, Zone 1, AEx ib IIA T4 Gb
Zone 21, AEx ib IIIC T120°C Db
IP66/IP67/IP68, -25°C≤Ta≤+50°C

CA

Ex ib IIA T4 Gb
Ex ib IIIC T120°C Db
IP66/IP67/IP68, -25°C≤Ta≤+50°C



Equipment group:
I: Mining
II: Other Environments (non-mining: chemical industrials, oil refineries, etc.)

Explosive atmospheres
G: Gases, vapors and mist
D: Dusts

Level of Protection:
ia: Intrinsically safe (Zone 0/1/2)
ib: Intrinsically safe (Zone 1/2)

Temperature Class
T1: 450°C
T2: 300°C
T3: 200°C
T4: 135°C
T5: 100°C
T6: 85°C

Dust & Water
Ingress Protection

II 2G Ex ib IIA T4 IP66/IP67/IP68 **GAS**

Explosion-proof Standard:
EU ATEX directive
and IECEx standards

Classification for hazardous places
1: Very high level (zone 0 or zone 20)
2: High level (zone 1 or zone 21)
3: Normal level (zone 2 or zone 22)
Zone 0: present continuously
Zone 1: present intermittently
Zone 2: present abnormally

Gas Group:
I: Methane (Mining)
IIA: Propane
IIB: Ethylene
IIC: Acetylene, hydrogen
(Hazard Level: IIC>IIB>IIA)

DUST

Equipment group:
I: Mining
II: Other Environments (non-mining: chemical industrials, oil refineries, etc.)

Explosive atmospheres
G: Gases, vapors and mist
D: Dusts

Level of Protection:
ia: Intrinsically safe (Zone 20/21/22)
ib: Intrinsically safe (Zone 21/22)

II 2D Ex ib IIIC T120°C IP66/IP67/IP68

Explosion-proof Standard:
EU ATEX directive
and IECEx standards

Classification for hazardous places
1: Very high level (zone 0 or zone 20)
2: High level (zone 1 or zone 21)
3: Normal level (zone 2 or zone 22)
Zone 0: present continuously
Zone 1: present intermittently
Zone 2: present abnormally

Dust Group:
IIIA: combustible flyings
IIIB: non-conductive dust
IIIC: conductive dust

Temperature
Class

Dust & Water
Ingress Protection

Equipment group:
I: Mining
II: Other Environments (non-mining: chemical industrials, oil refineries, etc.)

Explosion-proof Standard:
EU ATEX directive
and IECEx standards

Dust & Water
Ingress Protection

I M2 Ex ib IP66/IP67/IP68 **MINING**

M1: Equipment must continue to operate in a potentially explosive environment.
M2: Equipment does not operate in a potentially explosive environment. (Hazard Level: M1>M2)

Level of Protection:
ia: Intrinsically safe (Category M1/M2)
ib: Intrinsically safe (Category M2)



Born for Safety




Wider range of operation temperature (in Ex area)

Thanks to new explosion-proof materials and advanced mechanical design, the HP715Ex IIA is built to operate in temperatures from -25°C to 60°C in explosion-prone areas. With stable and even heat dissipation, the HP715Ex IIA is engineered to perform in the extreme conditions, enhancing safety and efficiency to everyday work.



More powerful intrinsically safe circuit

The HP715Ex IIA adopts innovative silicone encapsulation technology to prevent liquid, inflammable dust, or explosive gas from intruding into internal circuits. With multiple circuit protection mechanisms, the HP715Ex IIA strictly limits the electrical circuit's energy to a non-ignitable level during operation. The newly developed integrated circuits enable a transmission power of 2 W and a maximum audio power of 2 W, thereby increasing communication distance and audio volume.

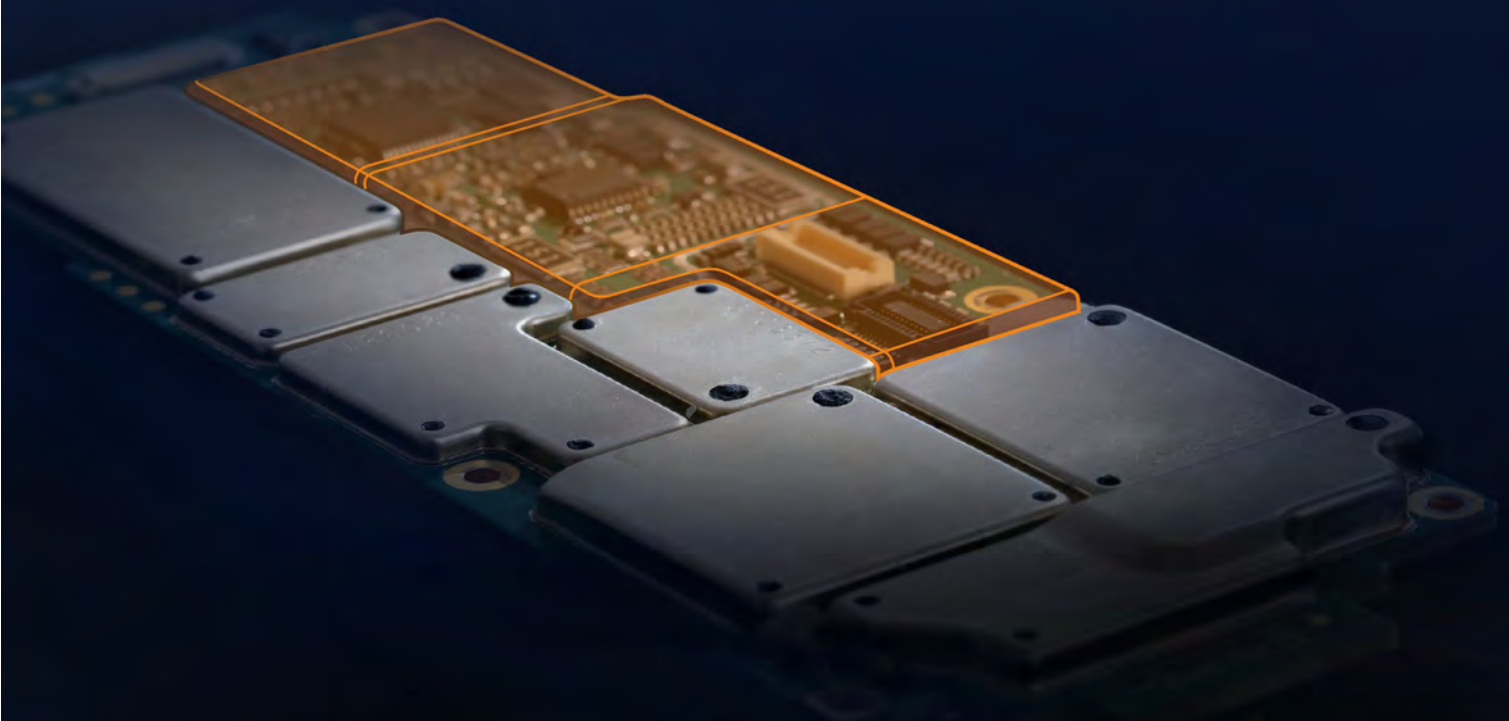

More rock-solid IS battery

The intrinsically safe battery of the HP715Ex IIA cannot detach from the radio, even if dropped, thanks to a battery protection plate and a battery lock. This design ensures that the battery will never become detached, preventing potential sparks in hazardous circumstances. Additionally, the HP715Ex IIA must not be used with non-original batteries. If a non-original battery is detected, an on-screen prompt and a flashing red LED indicator will alert the user, as the risk of safety to life and property cannot be compromised.

More professional anti-static technology

Electrostatic discharges are a source of ignition in explosive risk areas. With this in mind, the HP715Ex IIA first adopts high-strength, explosion-proof materials to prevent static electricity on the surface. Then, the HP715Ex IIA uses dual-material technology to resist the build-up of static electricity. This ensures that workers can freely use the HP715Ex IIA without worrying about the threats to lives and property from sudden fires or massive explosions.





Reliable to Use



Rugged-tested trust

The HP715Ex IIA is certified with IP6X and MIL-STD-810H after undergoing a comprehensive list of reliability tests, including accelerated life testing, impact testing for the radio with a 1.47-inch screen, and drop testing. It is rugged enough to withstand dust, shock, or sudden drops. Workers can use the radio in any harsh environments they encounter.



Dual antimagnetic mechanism

In areas containing metallic compounds, the HP715Ex IIA resists magnetic metal dust and shavings from damaging the speaker, ensuring superior audio quality and a longer service life. This is all thanks to the dual antimagnetic mechanism.





Built for Personnel Safety

Lone worker

The lone worker feature provides protection and reassurance for those who work alone, especially in dangerous environments, such as oil pipeline worker. If the HP715Ex IIA senses that the worker does not make any movement within a preset time, this radio will automatically alarm and report the location to a companion or the control centre for help.

Voice calls, encrypted and recorded

The HP715Ex IIA offers a perfect solution to protect the privacy and integrity of voice communications — TF card or GOB board. The radio can encrypt critical voice to safeguard your conversation against eavesdropping during voice calls, bringing ultimate peace of mind. Additionally, the radio can record calls in real time, helping trace back historical calls to reconstruct the scene. Beyond this, the software-based management services make it easy to query, play back, and export recording files in a unified and efficient way.

Man down

Man Down is ideal for emergency situations. If the worker has fallen, is unconscious, or is unable to move, the HP715Ex IIA automatically detects a sudden tilt towards the ground, and alarms and reports the location to a companion or the control centre for help. This is vital to prevent loss of life.

Precise positioning

With the built-in positioning module, the HP715Ex IIA supports the flexible combination of GPS, BDS, GLONASS, and Galileo satellite systems. The HP715Ex IIA also enhances positioning accuracy down to one metre, thanks to the dual-frequency positioning technology. Such reliable and accurate location information helps find the worker in need of assistance quickly in emergencies.



L1
L5





HIGH EFFICIENCY COMMUNICATIONS

The HP715Ex IIA takes critical communications to a new level, with the efforts of Hytera Audio Lab, RF & Antenna Lab, Energy-efficient Lab, and UX Design Lab*. The HP715Ex IIA keeps the workers always connected, from superior audio quality to extended radio range. The HP715Ex IIA is always operational thanks to the long-lasting battery. Moreover, the HP715Ex IIA facilitates the usage and management in terms of versatile connectivity and easy-to-use design.

* Hytera Professional Lab.



Superior Audio Quality

Super loudness

Most explosion-prone environments are noisy, thus how to provide clear and loud audio is the key to ensure effective communication among team members. The HP715Ex IIA, with a lighter and slimmer body, has a 2W speaker to deliver louder audio to improve team collaboration and work efficiency.

Ultra Clarity

With cutting-edge audio processing technology adopted, the HP715Ex IIA delivers crisp, clear audio even in complex environments, ensuring more reliable mission-critical and business-critical communications.

AI-based noise cancellation

The HP715Ex IIA adopts the most advanced AI-based noise cancellation algorithm and utilises machine learning. After learning and training thousands of noise samples, the HP715Ex IIA can quickly separate the human voice from the noise, ensuring workers receive the correct commands from the first word.

Water-porting design

The speaker features a unique water-porting design that can automatically expel water from the speaker's acoustic cavity fast. Even in heavy downpours, the HP715Ex IIA can still deliver clear audio.

Automatic gain control

Automatic gain control (AGC) automatically increases or decreases microphone gain to ensure consistently loud and clear audio output, regardless of how softly or loudly the workers are speaking into the microphone.

Howling suppression

Using the innovative howling suppression algorithm, the HP715Ex IIA eliminates screeching feedback when two radios are too close, even as close as 30 cm to each other.





Long-lasting Battery

The standard 2150 mAh battery, together with the cutting-edge low power consumption technology, can outlast the shift. Workers can check the remaining battery and battery health on the radio and extend the battery life using the smart charger.



Extended Radio Range

Thanks to the newly designed powerful IS circuits and RF optimisation solution, the HP715Ex IIA features 2W transmitting power and industry-leading receiving sensitivity (0.16µV), providing smoother communications even at a distance or in edge areas, further enhancing personal safety and work efficiency.



Versatile Connectivity



BT 5.3

The HP715Ex IIA can connect to wireless IS accessories* more quickly and stably, without the hassle of wires and cables. Moreover, the HP715Ex IIA can run the BT-based applications developed by the third parties to meet more scenarios.



WLAN

The HP715Ex IIA facilitates remote management through WLAN, such as programming*, upgrading*, and log management*. It is a smarter way to manage radios in batches without moving them back and forth between the field and the office, greatly reducing operational expenses.



NFC

The HP715Ex IIA can be easily recognised and managed via NFC tag as per actual requirements.

* Not provided by Hytera.
The radio adapts to third-party wireless IS accessories.

* Coming soon.

Easy to Use

About 390g (with standard battery and antenna)

- Comfortable for long-time grip

1.47-inch LCD screen

- Intuitive to operate the radio or view the info

Textured housing on the back

- Maintain a secure grip



Large LED indicator

- Easy to get the radio status

Vibration pattern

- Never miss any call and message



U-shaped groove

- Quick to attach and release the belt clip



User-friendly UI

- Channel and User Group Visual Selection
- Status information clear at a glance

Purpose-built knob and keys

- Volume/channel selector knob
- Enlarged emergency key
- Three programmable keys





At a Glance



SPECIFICATIONS

General	
Frequency Range	UHF: 400-480MHz; VHF: 136-174MHz
Channel Capacity	1024
Zone Capacity	64
Channel Spacing	12.5kHz/20kHz/25kHz
Operating Voltage	7.4V (rated)
Battery	2150 mAh IIC intrinsically safe Li battery (Typical)
Battery Life (5/5/90)	22h (GNSS OFF) 19h (GNSS ON)
Frequency Stability	±0.5ppm
Antenna Impedance	50Ω
Dimensions (H x W x D)	130 x 55 x 37mm
Weight (with antenna & battery)	about 390g
Display	1.47 inch LCD, 172*320 pixel, 262000 colors
Connectivity	BT 5.3 BLE+EDR/WLAN 2.4G/NFC: ISO/IEC 15693

Receiver	
Sensitivity	Analog: 0.16μV(12dB SINAD) 0.14μV(Typical)(12dB SINAD) Digital: 0.16μV/BER5%
Adjacent Channel Selectivity	TIA-603: 60dB@12.5kHz; 70dB@20/25kHz ETSI: 60dB@12.5kHz; 70dB@20/25kHz
Intermodulation	TIA-603: 70dB@12.5/20/25kHz ETSI: 65dB@12.5/20/25kHz
Spurious Response Rejection	TIA-603: 70dB@12.5/20/25kHz ETSI: 70dB@12.5/20/25kHz
Blocking	TIA-603: 80dB ETSI: 84dB
Hum and Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Rated Audio Power Output	0.5W
Rated Audio Distortion	≤3%
Audio Response	+1 ~ -3dB
Conducted Spurious Emission	<-57dBm

Transmitter	
RF Power Output	UHF: 4W/1W; VHF: 5W/1W
FM Modulation	11K0F3E@12.5kHz 14K0F3E@20kHz 16K0F3E@25kHz
4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD 12.5kHz Data and Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm < 1GHz; -30dBm > 1GHz
Modulation Limiting	±2.5kHz@12.5kHz; ±4.0kHz@20kHz; ±5.0kHz@25kHz
FM Hum & Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Adjacent Channel Power	60dB@12.5kHz; 70dB@20/25kHz
Audio Response	+1 to -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE+2™
Digital Protocol	ETSI-TS102 361-1, -2, -3

Environmental	
Operating Temperature	-30°C to +60°C (in non-hazardous area) -25°C to +60°C (in hazardous area)
Storage Temperature	-40°C~ +85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (contact); ±15kV (air)
Dustproof & Waterproof	IP64/IP65/IP66/IP67/IP68 per IEC-60079-0:2017 & IEC-60529
Humidity	MIL-STD-810H
Shock and Vibration	MIL-STD-810H

Location Services	
GNSS	GPS, BDS, GLONASS, Galileo
TTF(TIME TO FIRST FIX) Cold Start	<35 seconds
TTF(TIME TO FIRST FIX) Hot Start	<1 second
Horizontal Accuracy	1 m (dual-frequency GNSS, 95% probable, -130 dBm, ≥ 22 operational satellites)

Accuracy specs are for long-term tracking (95th percentile values>5 satellites visible at a nominal -130dBm signal strength)

Standard Accessories



Battery (Standard Capacity)



Charger



Power Adapter



Antenna



Belt Clip



Strap

Optional Accessories



Remote speaker Microphone



Earpiece



Carry Case



Intrinsically Safe Hamlet Heavy Duty Noise-cancelling Headset kit



Intrinsically Safe and Adjustable Earset



Intrinsically Safe Large PTT



Hytera Communications Europe

939 Yeovil Road, Slough, Berkshire, SL1 4NH

info@hytera-europe.com | www.hytera-europe.com



[www.facebook.com
/HyteraEurope](https://www.facebook.com/HyteraEurope)



[www.linkedin.com/company/
hytera-communications-uk](https://www.linkedin.com/company/hytera-communications-uk)



[www.instagram.com
/Hytera.Europe](https://www.instagram.com/Hytera.Europe)



Subscribe on YouTube



Hytera reserves the right to modify the product design and the specifications.
In case of a printing error, Hytera does not accept any liability. All specifications are subject to change without notice.